

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

**(10) International Publication Number**  
**WO 01/22139 A1**

- Published:**

— *With international search report.*

- Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**(S7) Abstract:** A polarization diversity scheme for managing the polarization dependence of a microring resonator which employs two resonators serially arranged and constructed to separately filter transverse electric (TE) and transverse magnetic (TM) polarization components of a predetermined wavelength in a randomly polarized DWDM optical signal, and to recombine the separately filtered components prior to output from an optical component employing the inventive polarization diversity scheme.

CHANNEL-DROPPING FILTER HAVING TWO RESONATORS FOR COUPLING THE TWO POLARISATION  
COMPONANTS**FIELD OF THE INVENTION**

5

The present invention is directed to polarization independent optical filters.

**BACKGROUND OF THE INVENTION**

Optical signal transmission encounters problems similar to those found in electrical  
10 networks, and also encounters problems unique to optical networks. For example, both  
electrical and optical networks must handle ever-increasing amounts of data (e.g., voice,  
video, audio, text, graphics, etc.). For optical networks, various multiplexing schemes are  
employed (e.g., wave division multiplexing (WDM), dense WDM, and ultra-dense WDM) to  
increase transmission bandwidth by simultaneously transmitting data from a plurality of  
15 sources to a plurality of destinations over a single optical medium such as, for example, a  
fiber-optic cable or waveguide. Obviously, the data from the plurality of sources is not  
intended for the same destination and it is necessary to selectively switch and route the  
various data to its intended destination using filters, switches, couplers, routers, etc.

An optical signal typically comprises a plurality of wavelengths, with each wavelength  
20 representing data from a different source. An optical network must be able to direct each  
wavelength (i.e., each separate data source), separate from the other wavelengths, over  
various paths in the network. Switching/filtering not only facilitates routing of a desired  
wavelength to its intended destination, it also facilitates re-routing in the case of network  
failure (e.g., fiber-optical cable breakage), or to alleviate network congestion, as two  
25 examples. As the need for bandwidth continues to increase (whether for optical or electrical

networks), so too does the need to distinguish the various signals being simultaneously transmitted.

Unique to optical transmission are the polarization modes of an optical signal. A single optical signal may have both transverse electric (TE) and transverse magnetic (TM) modes, each propagating through the optical components of the network at different speeds and generally experiencing slightly different conditions. A WDM signal, for example, is randomly polarized, with each wavelength having a different, independent polarization. Optical fiber, for example, has a small birefringence such that, after propagating through any substantial length of fiber, the optical signal arriving at the end of the fiber will have a random, unpredictable polarization different from that at the input end of the fiber. Thus, any subsequent optical component into which the optical signal is coupled must not differentiate between the different polarizations if the optical network is to be transparent to polarization. It is thus desirable to provide an optical system, component, and/or device that is essentially polarization independent and that enables transmission of a randomly polarized multi-wavelength optical signal.

It is desirable that optical networks (and the systems and components that make up the networks) be capable of handling both polarization modes.

It is thus desirable to provide an optical a system, component, and/or device that is essentially polarization independent and that enables transmission of a polarized multi-wavelength optical signal.

### SUMMARY OF THE INVENTION

The present invention is directed to a polarization independent, channel-dropping optical filter comprised of two complementary filtering elements: one tuned for TE

polarization mode and the other for TM polarization mode. The filtering elements are preferably tuned to the same predetermined wavelength so that a specific wavelength may be separated (i.e., filtered) from a randomly polarized wavelength division multiplexed (WDM) optical signal. The filtering elements also preferably have the same peak transmission characteristics. The present invention also advantageously filters both polarization modes of the desired wavelength. The filter further comprises input and output waveguides which strongly confine and guide a polarized multi-wavelength optical signal. Each waveguide is separated from the filtering elements by a gap over which the optical signal may be coupled to and from the filtering elements.

10 The filtering elements preferably comprise a micro-ring or circular disk resonator, or a non-circular micro-ring resonator with substantially straight sections that define a coupler length that facilitates light transfer between the waveguides and resonators. The resonators of the inventive filter preferably satisfy the following requirements: one resonator couples only TE polarization mode and the other couples only TM polarization mode; the resonators are  
15 tuned to the same resonance wavelengths for both TE and TM polarization modes; and the resonators have the same transfer characteristics for both TE and TM polarization modes.

The resonators are preferably photonic-well or photonic-wire waveguides that strongly confine (e.g., in the planar direction) and guide light. The strong confinement characteristics make it possible to construct resonators having relatively small bend radii (e.g., on the order  
20 of approximately 10 microns).

The evanescent coupling between the straight waveguides and the resonator is dependent on the gap size, the waveguide width, and the material indices inside and outside the waveguides. For better control of the coupling, a race-track shaped resonator may be used, i.e., one with substantially straight coupling sections having a pre-determined length

and that are disposed in substantially parallel relation with the input and output waveguides. With proper choice of the gap size and waveguide width, for example, it is possible to design the resonator to be favorable for either TE or TM modes. The exact coupling factor will then be determined by the length of the straight coupling section.

5 Preferably, the filter is constructed having the following parameters: a gap is defined between the input waveguide and resonators, and between the resonators and output waveguide that has a width which is less than  $.5\ \mu\text{m}$ ; the width of the waveguides (including the waveguides of the resonators) is less than  $1\ \mu\text{m}$ ; the coupler length is less than  $50\ \mu\text{m}$ ; and the ratio of the index of refraction inside the waveguides to the index of refraction of the  
10 medium (e.g. air) in the gap between the waveguides is greater than 1.5.

The operation of the filter is affected by the polarization of the light signal. For TE mode signals, it is preferred that the width of the waveguides be less than  $.25\ \mu\text{m}$ . As for TM mode signals, it is preferred that the width of the waveguides be greater than  $.35\ \mu\text{m}$ .

The relationship between the waveguide width and gap width and their effect on  
15 polarization is discussed in detail in co-pending patent application serial number \_\_/\_\_, \_\_, \_\_, entitled Nanophotonic Directional Coupler Device, the entire content and disclosure of which is hereby incorporated by reference.

It is preferred that symmetry be achieved in the filter design and construction. Specifically, the waveguides are similarly or substantially similarly formed (e.g., materials,  
20 dimensioning, etc.) to enable efficient transfer of the light signal between the input/output waveguides and the resonators.

Thus, the present invention is directed to a novel optical filter comprised of polarization dependent components to provide a polarization independent device.

The invention accordingly comprises the features of construction, combination of elements, and arrangement of parts which will be exemplified in the disclosure herein, and the scope of the invention will be indicated in the claims.

5

### **BRIEF DESCRIPTION OF THE DRAWINGS**

In the drawing figures, which are not to scale, and which are merely illustrative, and wherein like reference characters denote similar elements throughout the several views:

FIG. 1 is a schematic view of a prior art channel-dropping filter having input and output waveguides coupled to a single micro-ring resonator;

10 FIG. 2 is a schematic view of a polarization independent channel-dropping filter having two wavelength and polarization-tuned micro-ring resonators and constructed in accordance with the present invention;

FIG. 3 is a schematic view of a multi-stage polarization independent channel-dropping filter constructed in accordance with the present invention;

15 FIG. 4 is a cross-sectional view taken along the line 4-4 of FIG. 2; and

FIG. 5 is a graph depicting the relationship between coupler length and gap size at various waveguide widths for both TE and TM polarization modes.

### **DETAILED DESCRIPTION OF THE PRESENTLY PREFERRED EMBODIMENTS**

20 The present invention is directed to a polarization independent channel-dropping optical filter comprised of two complementary filtering elements; one tuned to TE polarization and the other to TM polarization. The filtering elements are also preferably tuned to the same predetermined wavelength so that both polarization modes of a specific wavelength may be separated (i.e., filtered) from a randomly polarized wavelength division

multiplexed (WDM) optical signal. The filter further comprises input and output waveguides which strongly confine and guide a polarized multi-wavelength optical signal. Each waveguide is separated from the filtering elements by a gap over which the optical signal may be coupled to and from the filtering elements.

5 Referring first to FIG. 1, the general operation of a channel-dropping filter, designated generally as 50, will now be discussed. Channel-dropping filters include a resonator 20 tuned or tunable to a particular wavelength. When a multi-wavelength optical signal such as, for example, a wave-division multiplexed (WDM) signal, propagates in (i.e., is guided by) the input waveguide 10, a portion of that signal (in terms of optical power but including all  
10 wavelengths of the signal) is coupled from waveguide 10 into the resonator 20. The wavelength of the coupled signal that is on-resonance with the wavelength to which the resonator 20 is tuned constructively interferes within the resonator 20, while off-resonance wavelengths destructively interfere and eventually attenuate. An optical signal having only the on-resonance wavelength is coupled from the resonator 20 to the output waveguide 30,  
15 and exits the filter 50 as a transmission signal T. A residual part (i.e., that part not coupled from the input waveguide 10 to the resonator 20) of the optical signal from the optical source 100 exits the filter from the input waveguide 10 as a reflection signal R. The resonator 20 may be fixedly tuned to a particular wavelength by virtue of its design and construction. Alternatively, the resonator 20 may be selectively tuned by application of an electrical signal  
20 or field and due to the electro-optic effect, which refers to a change in the refractive index of a material under the influence of an electrical signal or field.

The filter 50 depicted in FIG. 1 is polarization dependent and can only effectively transmit one of the two polarization modes. Thus, light may be transmitted for one polarization mode, yet attenuated for the other polarization mode. This is clearly undesirable

for optical communications where an optical signal may shift between polarization mode as the signal propagates through the waveguide (or optical fiber, as the case may be).

The present invention provides a novel solution to address polarization in an optical signal that overcomes the shortcomings of the prior art. Optical communication systems and components may now be constructed that are polarization independent by utilizing complementary polarization dependent components (one tuned to each polarization mode). Unless otherwise stated, the input waveguide, resonators (actually constructed as a continuous waveguide having generally parallel straight sections (coupler lengths) joined by longitudinally disposed arcuate sections), and output waveguide are similarly, if not identically, constructed. Thus, discussion of the construction, material, dimensions, operation, etc., of one waveguide shall apply to the other waveguides, unless the contrary is stated. Similarly, discussion of the operation of the input waveguide 60 (see, e.g., FIG. 2) shall apply to the output waveguide 90, unless stated otherwise.

Referring next to FIG. 2, a polarization independent channel-dropping filter 150 constructed in accordance with an embodiment of the present invention is there depicted. An optical source 100, which may be a laser, fiber-optic cable, waveguide, or other light generating or propagating device, provides a multi-wavelength optical signal input (e.g., WDM, DWDM, UDWM signal, or the like) to the input waveguide 60. The input waveguide 60 may be either a photonic-well or a photonic-wire construction, such as those disclosed in U.S. Patent Nos. 5,790,583 and 5,878,070, respectively, the entire contents and disclosures of which are hereby incorporated in their respective entireties. A cross-section of the waveguides and resonators are is depicted in FIG. 4 and discussed in more detail below.

The primary difference between the photonic-well and photonic-wire construction is the refractive index of the semiconductor material above and below the core 62 (see, e.g.,



FIG. 4). In a photonic-well construction, the core 62 is surrounded by upper and lower cladding layers 66, 64 of relatively low (with respect to the refractive index of the core material) refractive index material; the lower cladding layer 64 being disposed on a substrate 68. In a photonic-wire construction, the core 62 is surrounded by upper and lower cladding layers 66, 64 of relatively low refractive index material. Both constructions have relatively low refractive index material 110 laterally surrounding the waveguide 60 and disposed in the gap g between the waveguides 60, 90 and resonators 70, 80. The construction of the output waveguide 90 and resonators 70, 80 (170 and 180 in FIG. 3) are substantially, if not identically, the same as just described.

The index of refraction inside the waveguide  $n_{wg}$  refers to the index of refraction of the core 62 material. The core 62 may be formed from Gallium Arsenide or Indium Phosphide; both these materials have an index of refraction that is approximately 3.5. For a photonic-well construction, the upper and lower cladding layers 66, 64 are preferably constructed of a material having a relatively high refractive index, when compared with the refractive index of the core 62. Thus, strong photon confinement is provided only laterally of the waveguide by the relatively low refractive index material 110 provided in the gap g and otherwise around the waveguide (see, e.g., FIG. 2). For a photonic-wire construction, the upper and lower cladding layers 66, 64 are preferably constructed of a material having a relatively low refractive index, when compared with the refractive index of the core 62. Thus, strong photon confinement is provided on all sides of the waveguide. Additionally, the index of refraction  $n_g$  refers to the index of refraction of a medium that is disposed in the gap g. Most typically, the medium will be air, having an index of refraction of 1.0. However, other insulative mediums can be used.

With continued reference to FIG. 2, first and second resonators 70, 80 may be constructed as either photonic-well or photonic-wire waveguides. Since the resonators 70, 80 are nearly identical (different waveguide and gap widths providing either TE or TM coupling), the following discussion is directed to the first resonator 70, it being understood that such discussion applies equally to the second resonator 80, with the exception of the different dimensions for the waveguide and gap width. The resonator 70 includes substantially straight input and output sections 72, 74 which respectively define a substantially constant gap  $g$  between the input waveguide 60 and output waveguide 90, and the resonator 70. As a result, input and output sections 72, 74 thus define a coupler length  $L$ , which is the length of optical path along which coupling occurs (from the input waveguide to the resonator, and to the output waveguide).

The filter 50 is preferably formed within the following dimensional parameters (see, e.g., FIG. 4): a gap  $g$  between the resonator 70 and each of the input waveguide 60 and the output waveguide 90 of less than approximately  $.5 \mu\text{m}$ ; a waveguide width  $w$  for each of the input, output, and resonators of less than approximately  $1 \mu\text{m}$ ; a coupler length  $L$  of less than approximately  $50 \mu\text{m}$ ; and, a ratio of the index of refraction of the core 62 to the index of refraction of a medium 110 surrounding the waveguide (i.e., in the gaps) which is preferably greater than 1.5. Preferably, one resonator has a waveguide width  $w_1$  of less than  $.25 \mu\text{m}$  for TE mode coupling, and the other resonator has a waveguide width  $w_2$  of greater than  $.35 \mu\text{m}$  for TM mode coupling, as depicted in FIG. 4. The width of the waveguide 60 will correspond generally to the width of the resonator 70, 80. Thus, where a resonator width  $w_1$  (see, e.g., FIG. 4) is less than  $.25 \mu\text{m}$ , the waveguide width will be approximately the same. Likewise, where the resonator width is greater than  $.35 \mu\text{m}$  the waveguide width will be approximately the same. The width of the input waveguide 60 thus tapers from less than

approximately  $.25\ \mu\text{m}$  to greater than approximately  $.35\ \mu\text{m}$ , at least in between the resonators 70, 80.

It is also preferred that symmetry be achieved in the filter 50 design and construction. Specifically, the waveguides 60, 90, and the resonators 70, 80 are similarly or substantially  
5 similarly formed (e.g., materials, dimensioning, etc., and with the exception of the resonator width) to enable efficient transfer of the light signal (also referred to herein as an optical signal).

As with all optical devices, operation of the channel-dropping filter 50 of the present invention is affected by the polarization of the light signal propagating within (through) the  
10 various waveguides of the device. For transverse electric (TE) mode signals, it is preferred that the width  $w_1$  (see, e.g., FIG. 4) of one resonator waveguide be less than  $.25\ \mu\text{m}$ . As for transverse magnetic (TM) mode signals, it is preferred that the width  $w_2$  of one resonator waveguide be greater than  $.35\ \mu\text{m}$ . If a filter 50 is designed to accommodate a light signal of a certain polarization, it may not operate efficiently with a signal of a different polarization.  
15 For example, if a filter is designed specifically to accommodate a TE mode light signal (i.e., constructed with waveguides less than  $.25\ \mu\text{m}$  wide), a TM mode signal will pass through the filter 50 with little or no transfer of signal between the input waveguide 60 and resonator.

By using two differently constructed resonators 70, 80, the present invention eliminates any concern for the polarization of the light signal, and provides efficient signal  
20 transfer from the input waveguide 60 to the output waveguide 90, via the resonators 70, 80, regardless of the polarization of the optical signal and further regardless of whether the optical signal contains both TE and TM polarization modes. The present invention thus provides a polarization independent channel-dropping filter by using pairs of polarized resonators.

The above-described dimensions of the waveguides may be calculated using the following formulas.

#### GAP WIDTH (g)

5 It is preferred that the gap width  $g$  between the input waveguide 60, and straight section 72, 82 (and between output waveguide 90 and straight sections 74, 84) of the resonators 70, 80 be less than  $.5 \mu\text{m}$ , and may be calculated as follows:

$$g < \frac{\lambda}{\sqrt{n_{wg}^2 - n_g^2}} \quad (1)$$

where,  $\lambda$  is the wavelength of the light signal in free space,  $n_{wg}$  is the index of refraction  
10 inside the waveguide; and  $n_g$  is the index of refraction in the gap.

#### WAVEGUIDE WIDTH (w)

The waveguides each have a width  $w$  that is preferably less than  $1 \mu\text{m}$ , and may be calculated using the following equation:

$$w < \lambda / n_{wg} \quad (2)$$

15 For TE mode signals, the waveguide width is preferably less than  $.25 \mu\text{m}$ , and for TM mode signals, greater than  $.35 \mu\text{m}$ . Additionally, if the waveguides are photonic-wire construction, then the height  $h$  of the core 62 (see, e.g., FIG. 4)) is also preferably made equal between the input waveguide 60 and input straight sections 72, 82, and between the output waveguide 90 and output straight sections 74, 84. It is also preferred that for photonic-wire  
20 waveguides, the width  $w$  be equal to the height  $h$ .

#### COUPLER LENGTH (L)

As discussed above, the straight sections 72, 82 and 74, 84 of the resonators 70, 80 define a respective coupler length  $L$  that are preferably equal to each other. In a preferred embodiment, the coupler length  $L$  is less than 50  $\mu\text{m}$ .

The coupling factor is dependent on several factors including the gap widths, the  
5 coupler lengths, the waveguide widths, the indices of refraction, the polarization of the light being transferred, and the wavelength of the light. With the subject invention, the gap widths can be made larger than that disclosed in the prior art resonators, with longer coupler lengths being used to achieve the same coupling factor as with a circular resonator, for example. The increase in gap widths causes a drop in coupling factor, wherein, an increase in coupler length  
10 causes an increase in coupling factor. With the subject invention, by increasing the coupler length, an increase in coupling factor is achieved that is at least commensurate with the drop in the coupling factor caused by the increase in the gap width. The net effect is to produce a resonator that is easier to manufacture, because of the more generous gap width than that in the prior art, without any sacrifice in performance. Additionally, the coupler lengths can be  
15 easily changed since the length of the straight sections may be increased as needed to achieve the desired coupling factor. However, such an increase would require a corresponding change in the dimensions (i.e., radius) of the arcuate sections so as to preserve the round-trip optical path length. In this manner, resonators with generally the same overall width (as measured between the straight portions) can operate with different coupling factors. In contrast, prior  
20 art resonators, including circular and elliptical resonators, require changes in curvature, gap widths, etc., to achieve changes in coupling factor - which is difficult to realize.

As discussed above, light signals have either a TM polarization or a TE polarization. As a result, signals of different polarizations behave differently and have different transfer characteristics within a waveguide. For example, the effective indices of refraction  $N_s$  and

$N_A$  are respectively generally different for TE and TM signals. To take polarization into consideration, a TM specific waveguide is preferably designed with the additional limitation that the waveguide width  $w$  is greater than  $.35 \mu\text{m}$ . In contrast, a TE specific waveguide is preferably designed with the additional limitation that the waveguide width  $w$  is less than  $.25 \mu\text{m}$ . It should be noted that a light signal with a TM polarization will not transfer in a TE specific waveguide, whereas, a light signal with a TE polarization may partially transfer in a TM specific waveguide. In either case, there is very inefficient or no transfer of signal. Furthermore, the TM specific waveguide generally has larger coupler lengths than TE specific waveguide. This means that in order to design a waveguide that favors a particular polarization, the waveguide must satisfy a certain combination of waveguide width, gap size and coupler length simultaneously.

The relationship between gap width  $g$  and coupler length  $L$  is depicted in FIG. 5, in which two families of curves representing both TE and TM values for different waveguide widths  $w$  are plotted as a function of gap width  $g$  (for a gap refractive index  $n_g$  approximately equal to 1.0). A shaded band  $S$  represents the range of waveguide widths  $w$  of  $.25 \mu\text{m}$  to  $.35 \mu\text{m}$ . In this range of  $w$ , the coupler lengths are approximately the same for both TE and TM light polarized signals for all gap sizes. In particular, FIG. 5 shows that TE and TM curves for  $w = 0.3 \mu\text{m}$  cross at a point where the gap size is approximately  $0.2 \mu\text{m}$ . This means that polarization independence occurs where  $w = 0.3 \mu\text{m}$  and  $g = 0.2 \mu\text{m}$ .

#### RATIO OF INDICES OF REFRACTION

The ratio of the index of refraction inside the waveguide  $n_{wg}$  to the index of refraction inside the gap  $n_g$  is preferably greater than 1.5. Stated simply:

$$n_{wg}/n_g > 1.5 \quad (3)$$

The relatively large difference in the indices of refraction provides strong confinement of a light signal inside the respective waveguides 60, 90, and within the resonators 70, 80.

### COUPLING FACTOR

The coupling factor is the indicator of the performance of an optical device. The parameters discussed herein have an impact on the coupling factor. When discussing coupling of an optical signal, the term "coupling factor" is used to indicate what percentage of the signal, assuming no losses, is coupled (i.e., transferred) between waveguides, for example. Thus, by varying one or more parameters, a desired coupling factor can be obtained. Specifically, coupling factor is calculated by finding a theoretical coupling length ( $L_c$ ) for a specific design at which 100% of the light signal theoretically passes from one waveguide to the other, assuming no losses. The theoretical coupling length may be calculated as follows:

$$L_c = \frac{\lambda}{2(N_s - N_a)} \quad (4)$$

where,  $N_s$  is an effective index of refraction for the symmetric mode of the coupled waveguides; and  $N_a$  is an effective index of refraction for the asymmetric mode of the coupled waveguides.

To achieve a theoretical complete transfer in an optical device, the theoretical coupling length  $L_c$  is solved for (using equation 4, for example), and the coupler lengths of first and second waveguides (from and to which the signal is coupled) are set equal to that calculated value.

The coupling factor ( $F_c$ ) can be calculated as follows:

$$F_c = \sin^2[\pi L / (2L)] \quad (5)$$

where  $L$  is the actual coupler length for which the coupling factor is being calculated.

Thus, the coupling factor is a function of the actual coupler length  $L$  and the theoretical coupling length  $L_c$ . Theoretically, the coupling factor equals 1.0 where  $L = L_c$  - however, a coupling factor of 1.0 cannot be actually achieved because of losses. It should also be noted that the coupling factor can be less than one, both at lengths greater than and  
 5 less than the theoretical coupling length.

The resonators of the present invention 70, 80 serve as a wavelength filter that separates out the desired wavelength (i.e., the on-resonance wavelengths) from the WDM optical signal. The resonance condition is satisfied when the round-trip length of the resonator is equal to an integer multiple of the optical wavelength in the waveguide medium.  
 10 The resonance wavelengths ( $\lambda_o$ ) for the resonators 70, 80 may be determined by the following equation:

$$L_{\pi} n_{eff} = m \lambda_o \quad (6)$$

where  $L_{\pi}$  is the round-trip length of the resonator 70, 80,  $n_{eff}$  is the effective index of the resonator waveguide, and  $m$  is the order of resonance. Because  $n_{eff}$  is different for TE and  
 15 TM, it is necessary to use a different value of  $L_{\pi}$  or to use a different ( $m$ ) in order to make  $\lambda_o$  the same for both TE and TM. Those conditions may be represented by equation (7):

$$\frac{L_{TE} n_{TE}}{m_{TE}} = \frac{L_{TM} n_{TM}}{m_{TM}} \quad (7)$$

If the order of resonance  $m$  is fixed to be the same for both resonators, then the required difference in  $L_{\pi}$  is given by the following equation:

$$\frac{\Delta L_{\pi}}{L_r} = \frac{\Delta n_{eff}}{n_{eff}} \quad (8)$$

where  $\Delta n_{eff} = n_{TM} - n_{TE}$  is the difference in the effective indices for TE and TM. The small difference in  $L_{\pi}$  will give rise to only a small difference in the free spectral range.



The resonators 70, 80 preferably have substantially the same transfer characteristics for both TE and TM polarization modes. The shape of the filter response of the resonator is determined primarily by peak value and the linewidth, both of which depend on the coupling factor and the round trip loss. The power transmission signal T and reflection signal R (see, e.g., FIG. 2) are given by the following equations:

$$T = \frac{(1 - R_1)(1 - R_2)A}{(1 - \sqrt{R_1 R_2} A)^2 + 4\sqrt{R_1 R_2} A \sin^2(\delta/2)} \quad (9)$$

$$R = \frac{(\sqrt{R_1} - \sqrt{R_2} A)^2 + 4\sqrt{R_1 R_2} A \sin^2(\delta/2)}{(1 - \sqrt{R_1 R_2} A)^2 + 4\sqrt{R_1 R_2} A \sin^2(\delta/2)} \quad (10)$$

where  $A = \exp(-\alpha L_{rt})$ , and  $\delta = (2\pi / \lambda) n_{eff} L_{rt}$ .  $R_1$  and  $R_2$ , are the reflection coefficients at the waveguide resonator coupling points (i.e., along the coupling lengths), related to the coupling factors  $F_{C1}$  and  $F_{C2}$  by  $R_i = 1 - F_{Ci}$  ( $i = 1, 2$ ). It is desirable to make  $R = 0$  at resonance (i.e., when  $\sin^2(\delta/2) = 0$ ). This requires that the following relationships be satisfied:

$$\sqrt{R_1} = \sqrt{R_2} A$$

$$\text{or } R_1 = R_2 A^2$$

$$\text{or } (1 - F_{C1}) = (1 - F_{C2}) A^2$$

$$\text{or } e^{-F_{C1}} = e^{-F_{C2}} e^{-2\alpha L_{rt}}$$

$$\text{or } F_{C1} \approx F_{C2} + 2\alpha L_{rt}$$

At resonance, the maximum transmission is given by the following equation:

$$T_{max} = \frac{F_{C2}}{F_{C1}} e^{-\alpha L_{rt}} \quad (11)$$

Thus, in order for the two resonators (i.e., the TE and TM filters) to have the same peak transmission (which is a requirement for a polarization independent filter), the loss and

the two coupling factors ( $F_{C1}$  and  $F_{C2}$ ) must be equal for both TE and TM. the requirement for polarization insensitivity is that the loss and the two coupling coefficients be equal for TE and TM.

In operation, and with reference first to FIG. 2, the channel-dropping filter 150 of the present invention receives a multi-wavelength optical signal from an optical source 100 that is guided by input waveguide 60. That signal includes a wavelength to which the resonators 70, 80 are tuned, e.g., 1550 nm. That optical signal may also include both TE and TM polarization modes. As the signal propagates past the first resonator 70, part of the optical signal is evanescently coupled to the first resonator 70. The off-resonance wavelengths destructively interfere within the resonator 70 and thus eventually attenuate. Only the on-resonance wavelength constructively interferes and couples out of the resonator 70 into the output waveguide 90. In addition, only one of the modes of the optical signal is coupled from the input waveguide 60 to the resonator 70 and to the output waveguide 90, depending upon the width of the input waveguide 70 and resonator waveguide. Similarly, part of the optical signal is coupled to the second resonator 80, where the on-resonance wavelength and the other mode couple to the output waveguide 90, where they recombine with the signal coupled from the first resonator 70 and are output from the filter 150. Thus, both polarization modes of an optical signal having a predetermined wavelength may be coupled from the WDM optical signal and redirected or re-routed to a desired destination.

A plurality of tuned resonators may be used to construct a  $1 \times N$  channel-dropping filter 250 as depicted in FIG. 3. The resonators 70, 80 and 170, 180 are provided in pairs, each pair being tuned to a particular wavelength and including one resonator tuned to TE mode polarization and the other tuned to TM mode polarization. A plurality (i.e.,  $N$ ) of output waveguides 90, 190 are provided to output a plurality of optical signals, each having a

different wavelength. Operation of the waveguides and resonators of the filter 250 of FIG. 3 are essentially the same as described above with respect to FIG. 2.

The resonators of the present invention may be tuned to a predetermined wavelength by virtue of their design and construction. Alternatively, they may be selectively tunable due  
5 to the presence of an electrical field or signal and due to the electro-optic effect.

Thus, while there have been shown and described and pointed out novel features of the present invention as applied to preferred embodiments thereof, it will be understood that various omissions and substitutions and changes in the form and details of the disclosed invention may be made by those skilled in the art without departing from the spirit of the  
10 invention. It is the intention, therefore, to be limited only as indicated by the scope of the claims appended hereto.

It is also to be understood that the following claims are intended to cover all of the generic and specific features of the invention herein described and all statements of the scope of the invention which, as a matter of language, might be said to fall therebetween.

CLAIMS

What is claimed is:

1. A polarization independent optical filter for receiving from an optical source a polarized wavelength-division multiplexed (WDM) optical signal having a plurality of wavelengths and defining random first and second polarizations, said filter comprising:

an input waveguide having a first width and a second width and for receiving the polarized WDM optical signal;

an output waveguide for outputting from said filter a polarized optical signal having a predetermined wavelength that is one of the plurality of wavelengths of the WDM optical signal and having the first and second polarizations;

a first filtering element, tuned to said predetermined wavelength and one of the first and second polarizations and optically coupled to said input waveguide and separated therefrom by a gap for optically coupling from said input waveguide a part of the optical signal having one of the predetermined wavelengths and one of the first and second polarizations;

a second filtering element, tuned to said predetermined wavelength and the other one of the first and second polarizations and optically coupled to said input waveguide, and separated therefrom by said gap, for optically coupling from said input waveguide another part of the optical signal having the predetermined wavelength and the other one of the first and second polarizations;

said first and said second filtering elements respectively coupling said part and said another part of the optical signal at said predetermined wavelength to

said output waveguide which outputs from said filter an optical signal at said predetermined wavelength and having the first and second polarizations.

2. A polarization independent optical filter as recited by claim 1, wherein  
5 the first polarization is transverse magnetic and wherein the second polarization is transverse electric.

3. A polarization independent optical filter as recited by claim 2, wherein  
10 said first filtering element comprises a first filtering waveguide having a width greater than  $.35\text{ }\mu\text{m}$  and is tuned to the first polarization, and wherein said input waveguide first width is greater than  $.35\text{ }\mu\text{m}$  and located proximate said first filtering waveguide, and wherein said second filtering element comprises a second filtering waveguide having a width less than  $.25\text{ }\mu\text{m}$  and is tuned to the second polarization, and wherein  
15 said input waveguide second width is less than  $.25\text{ }\mu\text{m}$  and is located proximate said second filtering element.

4. A polarization independent optical filter as recited by claim 1, wherein  
said gap is less than approximately  $0.5\text{ }\mu\text{m}$ .

20 5. A polarization independent optical filter as recited by claim 4, wherein  
said input and said output waveguides and said first and said second filtering elements have respective widths of less than approximately  $1.0\text{ }\mu\text{m}$ .

6. A polarization independent optical filter as recited by claim 5, wherein the first polarization is transverse magnetic and wherein the second polarization is transverse electric, and wherein said first filtering element comprises a first filtering waveguide having a width greater than  $.35\text{ }\mu\text{m}$  and is tuned to the first polarization, ,  
5 and wherein said input waveguide first width is greater than  $.35\text{ }\mu\text{m}$  and located proximate said first filtering waveguide, and wherein said second filtering element comprises a second filtering waveguide having a width less than  $.25\text{ }\mu\text{m}$  and is tuned to the second polarization, and wherein said input waveguide second width is less than  $.25\text{ }\mu\text{m}$  and is located proximate said second filtering element.

10  
7. A polarization independent optical filter as recited by claim 1, wherein said first and second filtering elements each comprise a micro-ring resonator.

15  
8. A polarization independent optical filter as recited by claim 1, wherein each of said first and second filtering elements includes a substantially straight coupling section defining respective coupler lengths between said first and second filtering elements and said input and output waveguides.

20  
9. A polarization independent optical filter as recited by claim 8, wherein each of said first and second filtering elements has substantially the same coupler length of less than approximately  $50\text{ }\mu\text{m}$ .

10. A polarization independent optical filter as recited by claim 1, wherein said first and second filtering elements have the same transfer characteristics for TE and TM polarization modes.

5 11. A multi-stage polarization independent optical filter for receiving from an optical source a randomly polarized wavelength-division multiplexed (WDM) optical signal having a plurality of wavelengths and defining first and second polarizations, said filter comprising:

10 an input waveguide having a first width and a second width and for receiving the polarized WDM optical signal;

a plurality of filtering elements each comprising:

15 an output waveguide for separately outputting from said filter a polarized optical signal having a first predetermined wavelength that is one of the plurality of wavelengths of the WDM optical signal and having the first and second polarizations;

20 a first resonator, tuned to said first predetermined wavelength and one of the first and second polarizations and optically coupled to said input waveguide, and separated therefrom by a gap, for optically coupling from said input waveguide a part of the optical signal having the predetermined wavelength and one of the first and second polarizations; and

a second resonator, tuned to said first predetermined wavelength and the other one of the first and second polarizations and optically coupled to said input waveguide, and separated therefrom by said gap, for optically

coupling from said input waveguide another part of the optical signal having the predetermined wavelength and the other one of the first and second polarizations;

said first and said second resonators respectively coupling said part and said another part of the optical signal at said first predetermined wavelength to said output waveguide which outputs from said filter an optical signal at said first predetermined wavelength and having the first and second polarizations.

12. A polarization independent optical filter as recited by claim 11, wherein the first polarization is transverse magnetic and wherein the second polarization is transverse electric.

13. A polarization independent optical filter as recited by claim 12, wherein each said first resonator comprises a first resonator waveguide having a width greater than  $.35\text{ }\mu\text{m}$  and is tuned to the first polarization, and wherein said input waveguide first width is greater than  $.35\text{ }\mu\text{m}$  and located proximate each said first resonator and wherein each said second resonator comprises a second resonator waveguide having a width less than  $.25\text{ }\mu\text{m}$  and is tuned to the second polarization, and wherein said input waveguide second width is less than  $.25\text{ }\mu\text{m}$  and is located proximate each said second resonator.

14. A polarization independent optical filter as recited by claim 11, wherein said gap is less than approximately  $0.5\text{ }\mu\text{m}$ .



15. A polarization independent optical filter as recited by claim 14, wherein each of said input and said output waveguides and each of said first and said second resonators have respective widths of less than approximately 1.0  $\mu\text{m}$ .

5 16. A polarization independent optical filter as recited by claim 15, wherein the first polarization is transverse magnetic and wherein the second polarization is transverse electric, and wherein each said first resonator comprises a first resonator waveguide having a width greater than .35  $\mu\text{m}$  and is tuned to the first polarization, and wherein said input waveguide first width is greater than .35  $\mu\text{m}$  and  
10 located proximate each said first resonator, and wherein each said second resonator comprises a second resonator waveguide having a width less than .25  $\mu\text{m}$  and is tuned to the second polarization, and wherein said input waveguide second width is less than .25  $\mu\text{m}$  and is located proximate each said second resonator.

15 17. A polarization independent optical filter as recited by claim 11, wherein each of said first and second resonators each comprise a micro-ring resonator.

18. A polarization independent optical filter as recited by claim 17, wherein each of said first and second resonators includes a substantially straight  
20 coupling section defining respective coupler lengths between each of said first and second resonators and each of said respective input and output waveguides.

19. A polarization independent optical filter as recited by claim 18, wherein each of said first and second resonators has substantially the same coupler length of less than approximately 50  $\mu\text{m}$ .

5

20. A polarization independent optical filter as recited by claim 11, wherein said first and second resonators have the same transfer characteristics for TE and TM polarization modes.

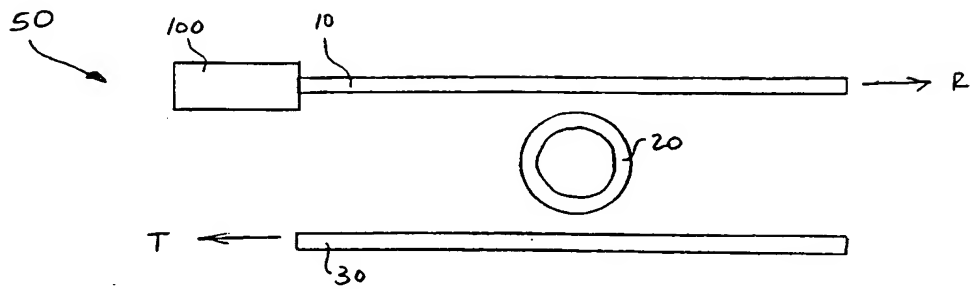


FIG. 1

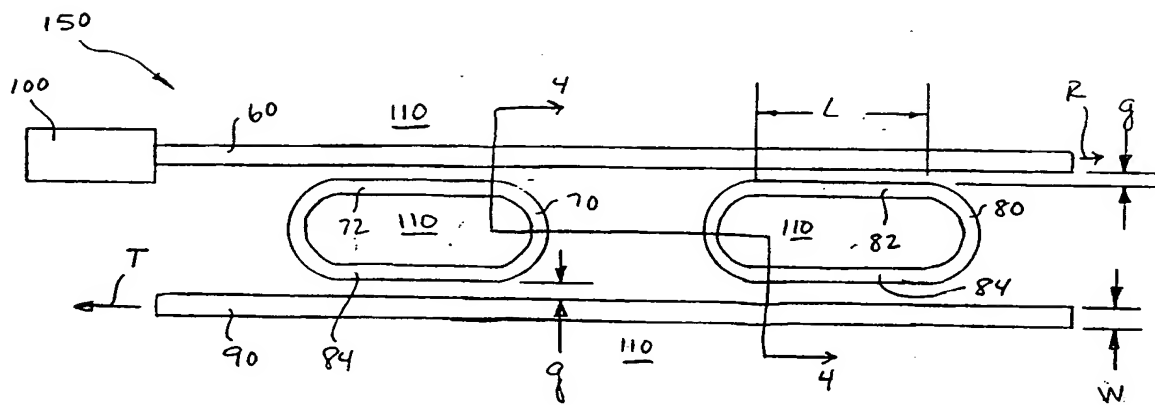


FIG. 2

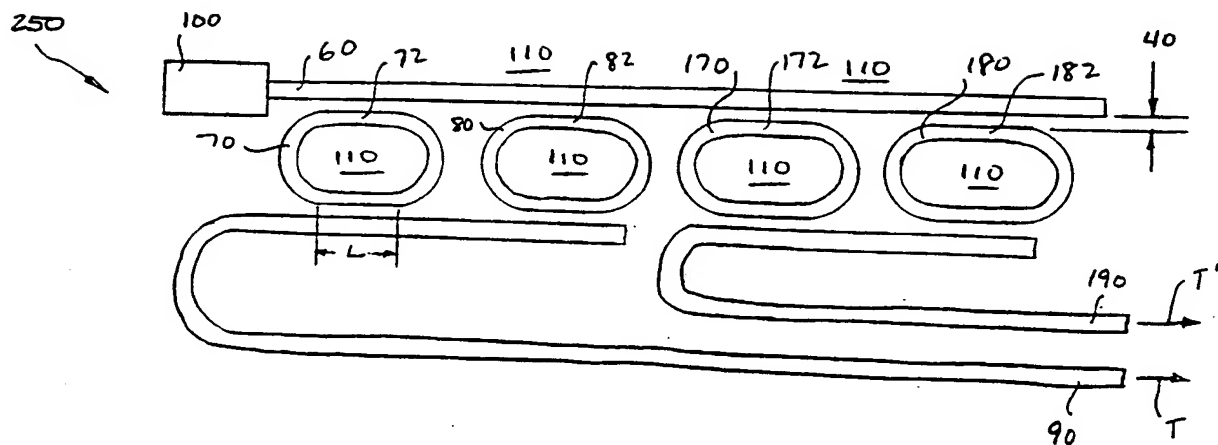


FIG. 3

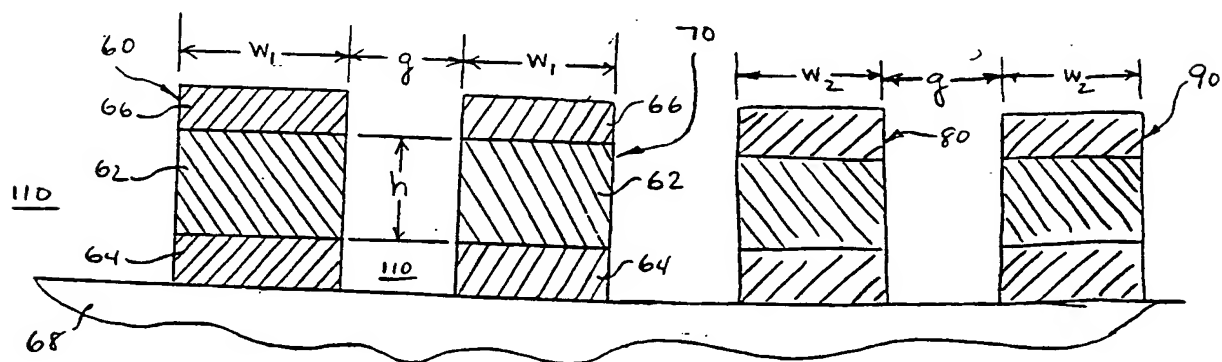


FIG. 4

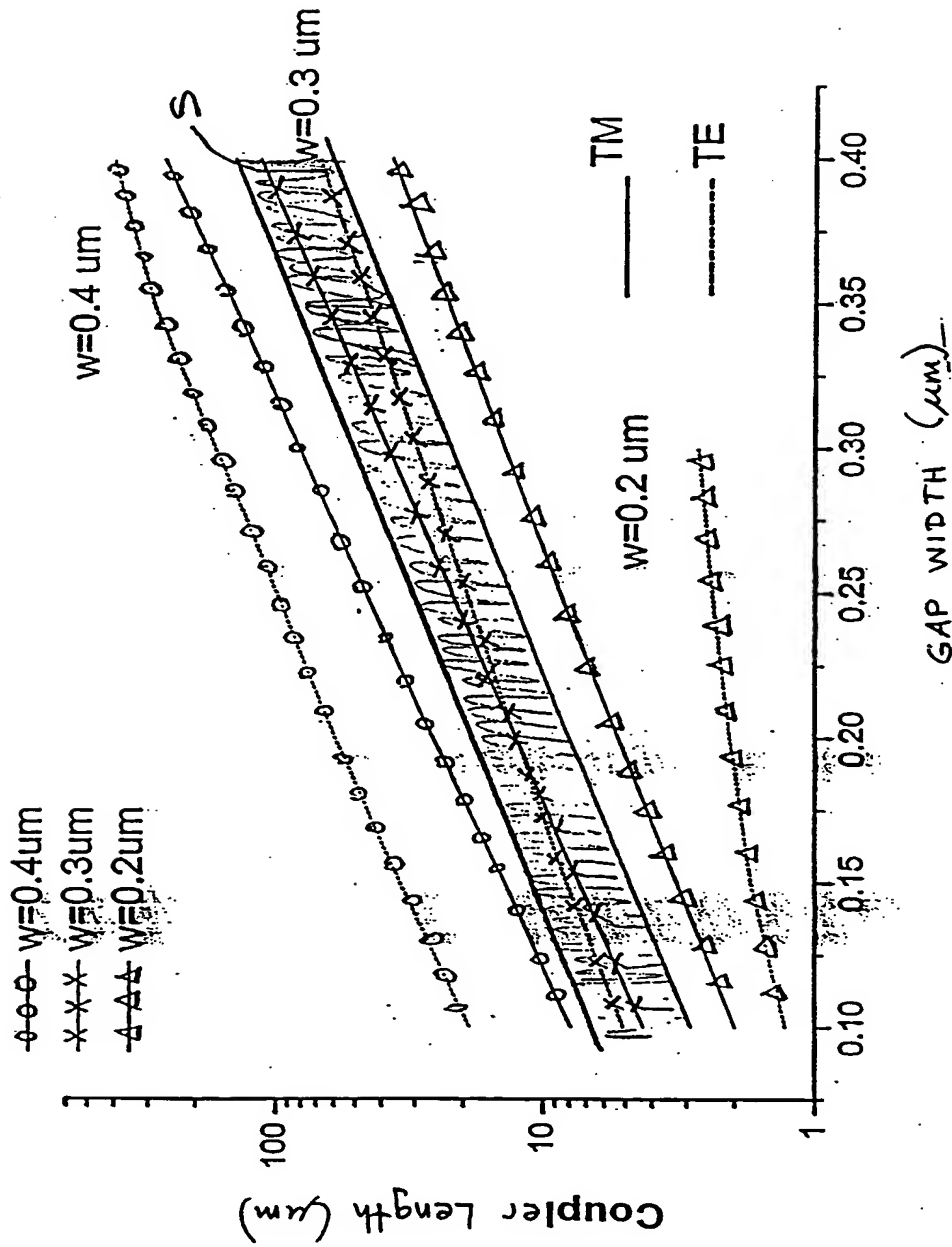


FIG. 5

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/26003

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 G02B6/293

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)  
EPO-Internal, PAJ, INSPEC

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 742 633 A (NOECKEL JENS UWE ET AL) 21 April 1998 (1998-04-21) abstract; figure 12 column 7, line 28 - line 50	1-20
A	CHIN M K ET AL: "DESIGN AND MODELING OF WAVEGUIDE-COUPLED SINGLE-MODE MICRORING RESONATORS" JOURNAL OF LIGHTWAVE TECHNOLOGY, US, IEEE. NEW YORK, vol. 16, no. 8, 1 August 1998 (1998-08-01), pages 1433-1446, XP000786578 ISSN: 0733-8724 the whole document --- -/--	1-20

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Z\* document member of the same patent family

Date of the actual completion of the international search

15 January 2001

Date of mailing of the international search report

23/01/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Jakober, F

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/26003

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 4 775 214 A (JOHNSON LAWRENCE A)  4 October 1988 (1988-10-04)  abstract; figure 15  column 9, line 45 - line 65  column 12, line 52 - line 62  -----</p>	1-20

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/26003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
---	---------------------	----------------------------	---------------------

US 5742633	A	21-04-1998	NONE
------------	---	------------	------

US 4775214	A	04-10-1988	NONE
------------	---	------------	------